Thank you

Pinell®
of Norway

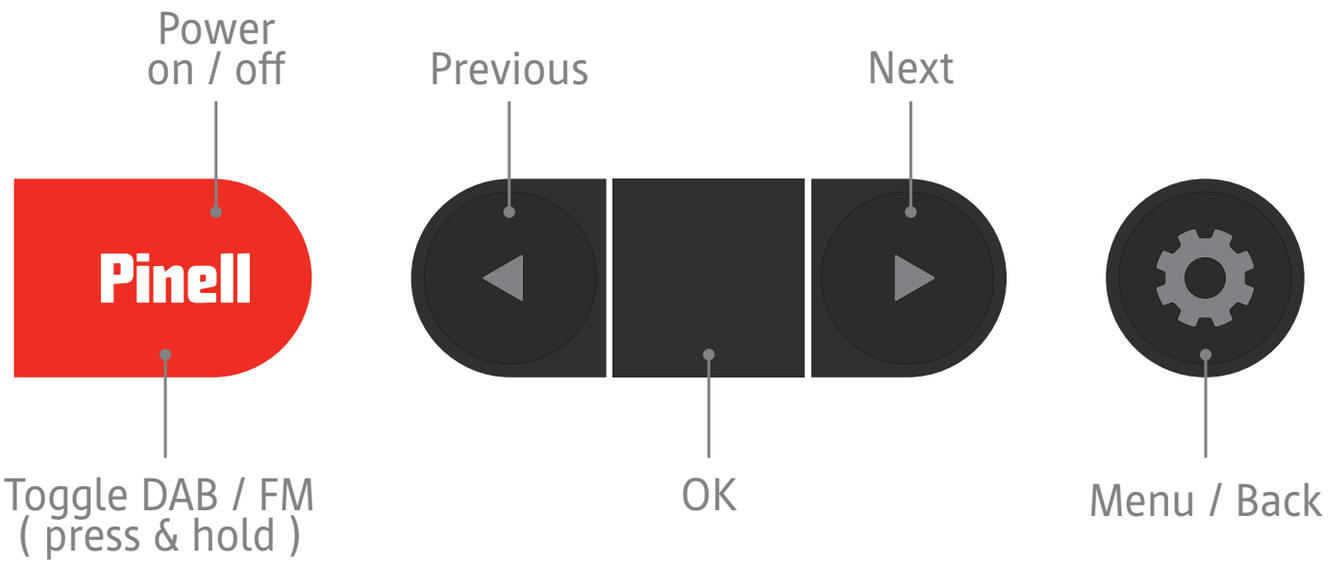
Power
on / off
Previous
Next
Pinell
Toggle DAB / FM
(press & hold)
OK
Menu / Back

As a user of our product, **you** are the most important person at Pinell.

We strive to make high quality audio products for the most demanding users. Imagined, designed and developed at our headquarter in Norway. It's for people like you we work hard every day to keep improving the quality and user friendliness of our products.

We sincerely hope you will get much joy and entertainment from your new radio.

Thank you for choosing a Pinell.

The Pinell Team
Oslo, Norway

General operation

The Pinell Go radio works in three modes: DAB radio, FM radio and line input (AUX).

When you plug an audio cable into the audio input, the Go automatically switches to **AUX** mode. Unplug the cable to go back to radio.

Pinell

When no audio cable is connected, hold the **PINELL** button to switch between **DAB** and **FM**.

Each mode has a dedicated menu called a **Mode Menu**. Press **MENU** to access this.

While navigating any menu, press **MENU** to move one step back or exit.

General settings that apply to all modes can be adjusted in the **System Menu**. You can reach the System Menu from any Mode Menu.

Note: To reduce your power consumption, the Pinell Go will automatically power off after 4 hours of uninterupted playback. Press any button or the volume control to extend this period.

4 steps to get you started

1 Mount the appropriate plug for your country to the power adapter.

2 Plug the power cord into the Pinell Go.

3 Press PINELL

4 Follow the on-screen instructions to set up the radio. See next page for details.

First time startup

In the box you will find a power adapter and 3 international power plugs. Mount the plug appropriate for your country and connect the power cord to the Pinell Go.

When you start the radio for the first time, you will be asked to choose your preferred language. Use the left and right buttons to find your language and press OK (center) to continue.

The radio will now automatically scan for all available DAB and FM stations. **We recommend to extend the aerial before this scan**, to allow optimal reception for the Pinell Go to find all available stations in your area.

That’s it! Happy listening.

1

Choose language:
English

2

Scanning DAB

3

DAB Scan complete
27 STATIONS FOUND

4

Scanning FM

5

FM Scan complete
27 STATIONS FOUND

6

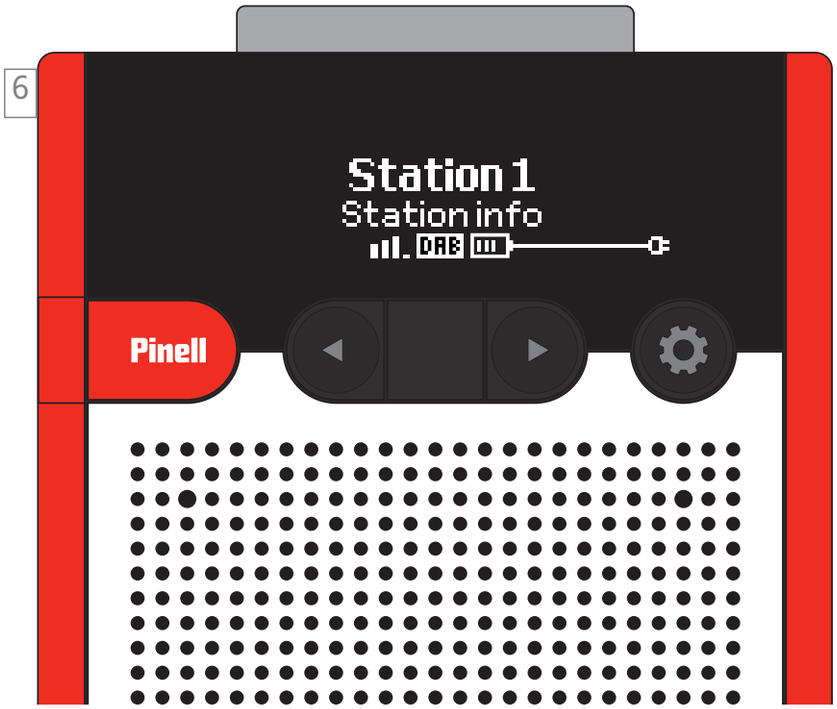
Station 1
Station info
DAB
Pinell

A few words about the battery

The Pinell Go is equipped with a powerful battery which should give you at least 24 hours of real playback time. In some cases more.

Feel free to leave the radio plugged into your power outlet at all times. We've built in intelligent battery management that automatically stops charging when the battery is full. The radio will thereafter run directly from wall power.

If your battery is completely exhausted, it'll take about 2-3 hours to reach a 75% charge. To protect your battery and to optimize its total lifespan, it'll take longer to fill the remaining quarter of your battery. A total of 12 hours is usually needed to charge the battery from empty to completely full.

When the battery is emtpy, the icon will blink for a few minutes before the radio shuts off.

The power cord icon is always displayed when the radio is connected to a power outlet.

A filled battery symbol is displayed when a complete charge has been reached. This means charging has stopped.

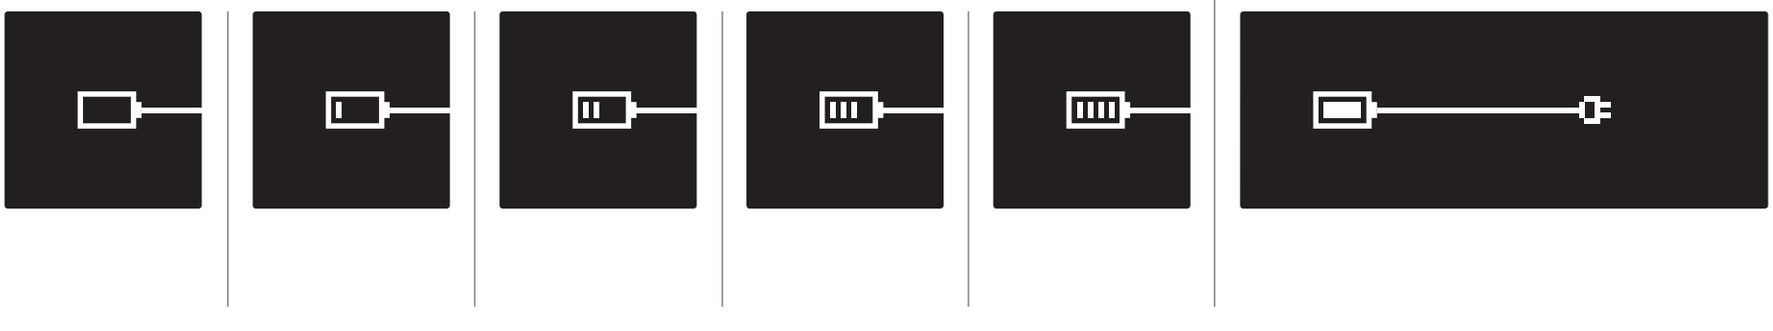

0 % 25 % 50 % 75 % 100 %

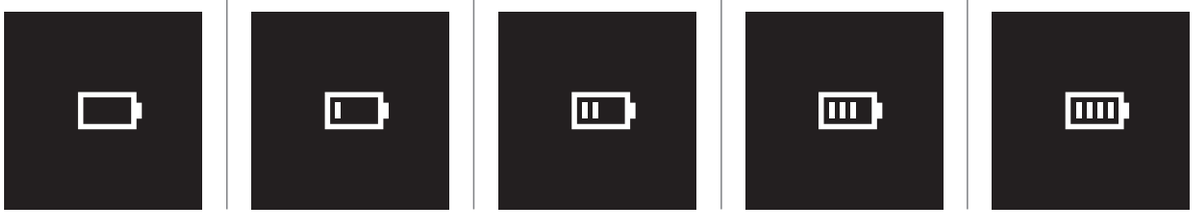

During playback, the battery indicator shows remaining power.
Each of the four bars represent approx. 25% of battery life.



If the internal battery has been removed, a battery icon with an “X” will be displayed.

AUX

External audio

Connect your music player to the Pinell Go to listen to your favourite music through the radio. When you connect a standard “mini-jack” audio cable the radio automatically switches to AUX for immediate playback from your device.

Remove the cable to listen to DAB or FM radio again.

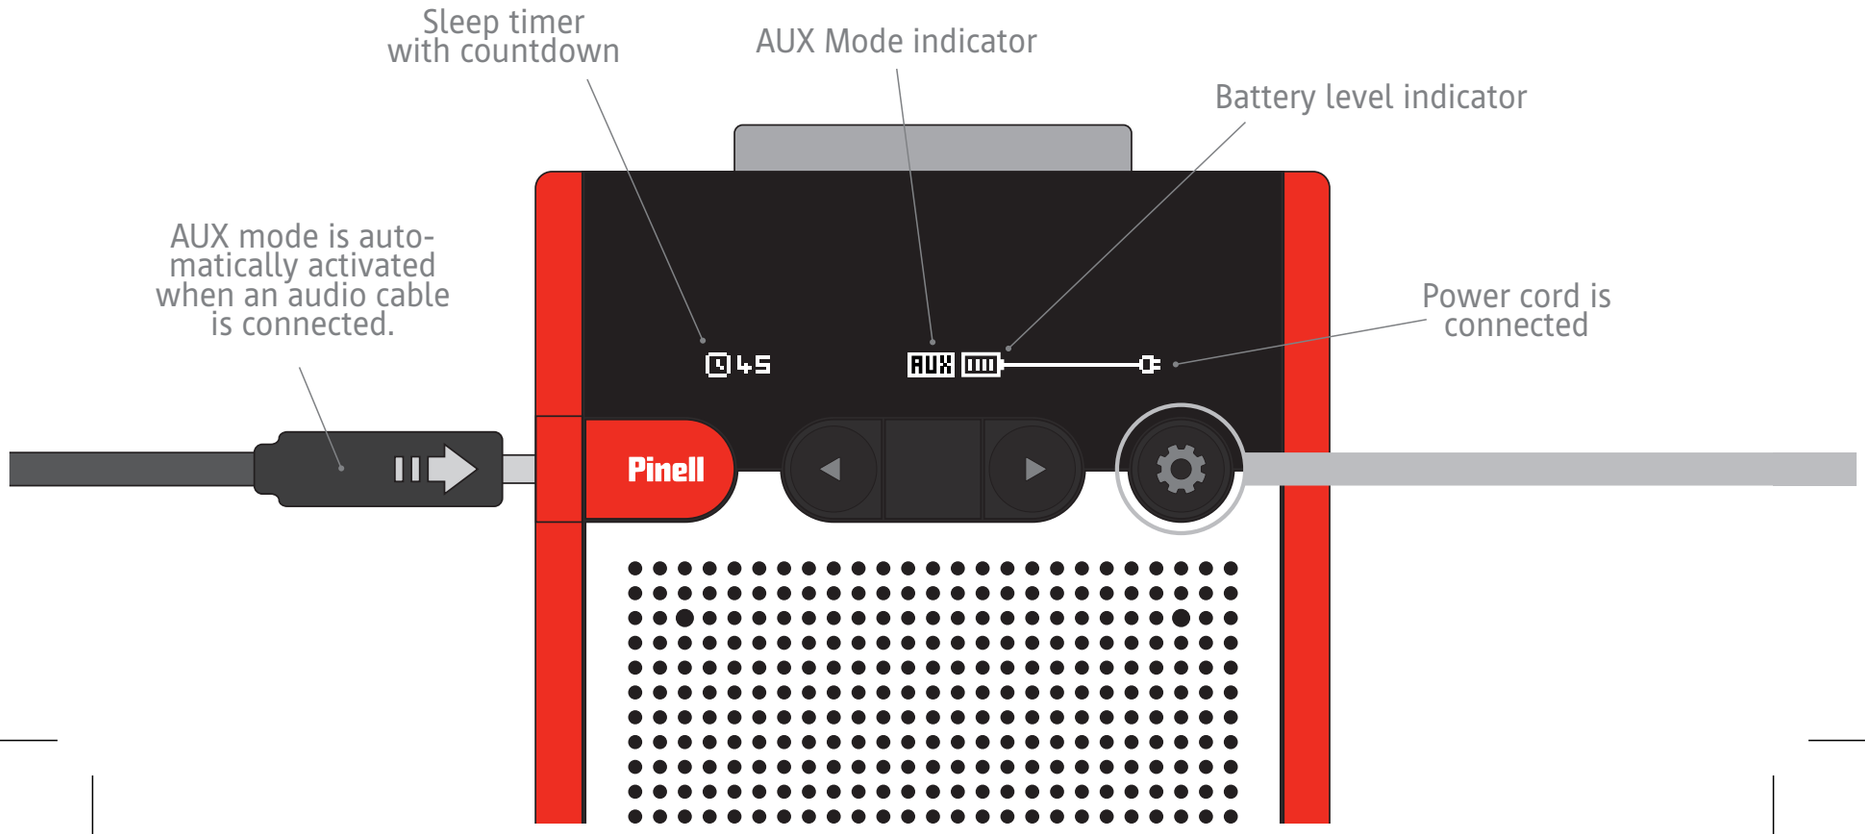

AUX MODE MENU

Sleep: The sleep function will power off the radio after a chosen period of time. Options are 15, 30, 45, 60 and 75 minutes.

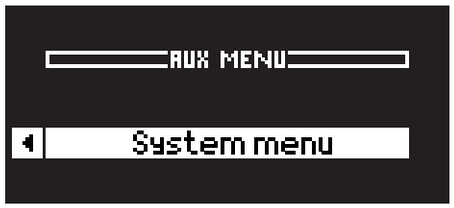

System menu: From all Mode Menus, this item will take you to the System Menu. See page 16 for more details.

DAB Radio

Switch between DAB and FM by holding the "PINELL" button.

DAB means digital radio, and in several countries it's replacing the FM broadcast system. If you don't have DAB reception where you live right now, chances are you soon will.

The first time you start the radio, all available stations will be stored in your station list in alphabetical order. No manual searching is required.

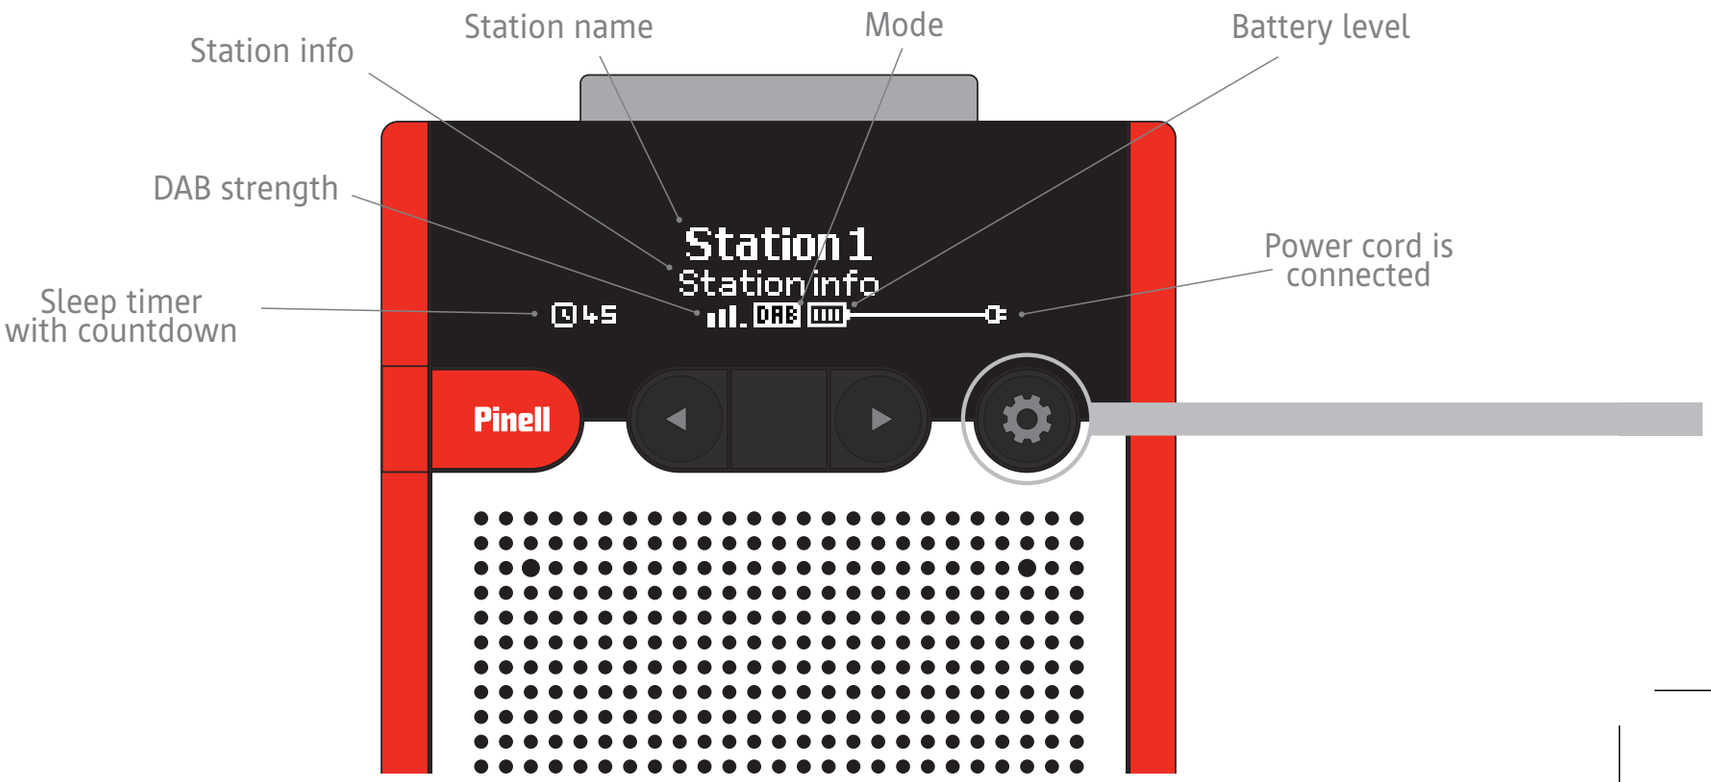

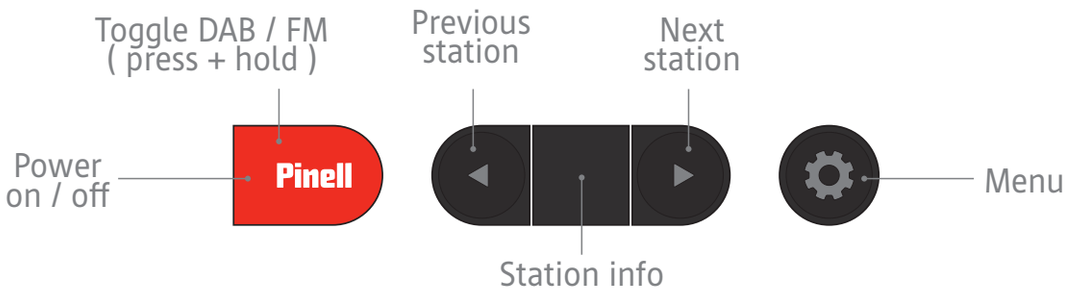

DAB MODE MENU

Sleep: The sleep function will power off the radio after the period of time you choose. Options are: 15, 30, 45, 60 and 75 minutes.

Rescan all stations: DAB stations are available in certain areas. So if you bring your Go to a new location, the stored list of stations may not be accurate. To fix this, choose “Rescan all stations” to refresh your station list to include any newly available stations and remove all unavailable stations.

FM Radio

Switch between DAB and FM by holding the "PINELL" button.

There are two ways to operate the radio in FM Mode: **Preset Mode** and **Search Mode**. Preset Mode is the default way: With LEFT and RIGHT, you can easily cycle through the list of stored stations. Search Mode is for when you want to do manual frequency searches.

To store a new station: press and hold the center button until "Station stored" is shown. To delete a station from the list, press and hold the center button and confirm when prompted.

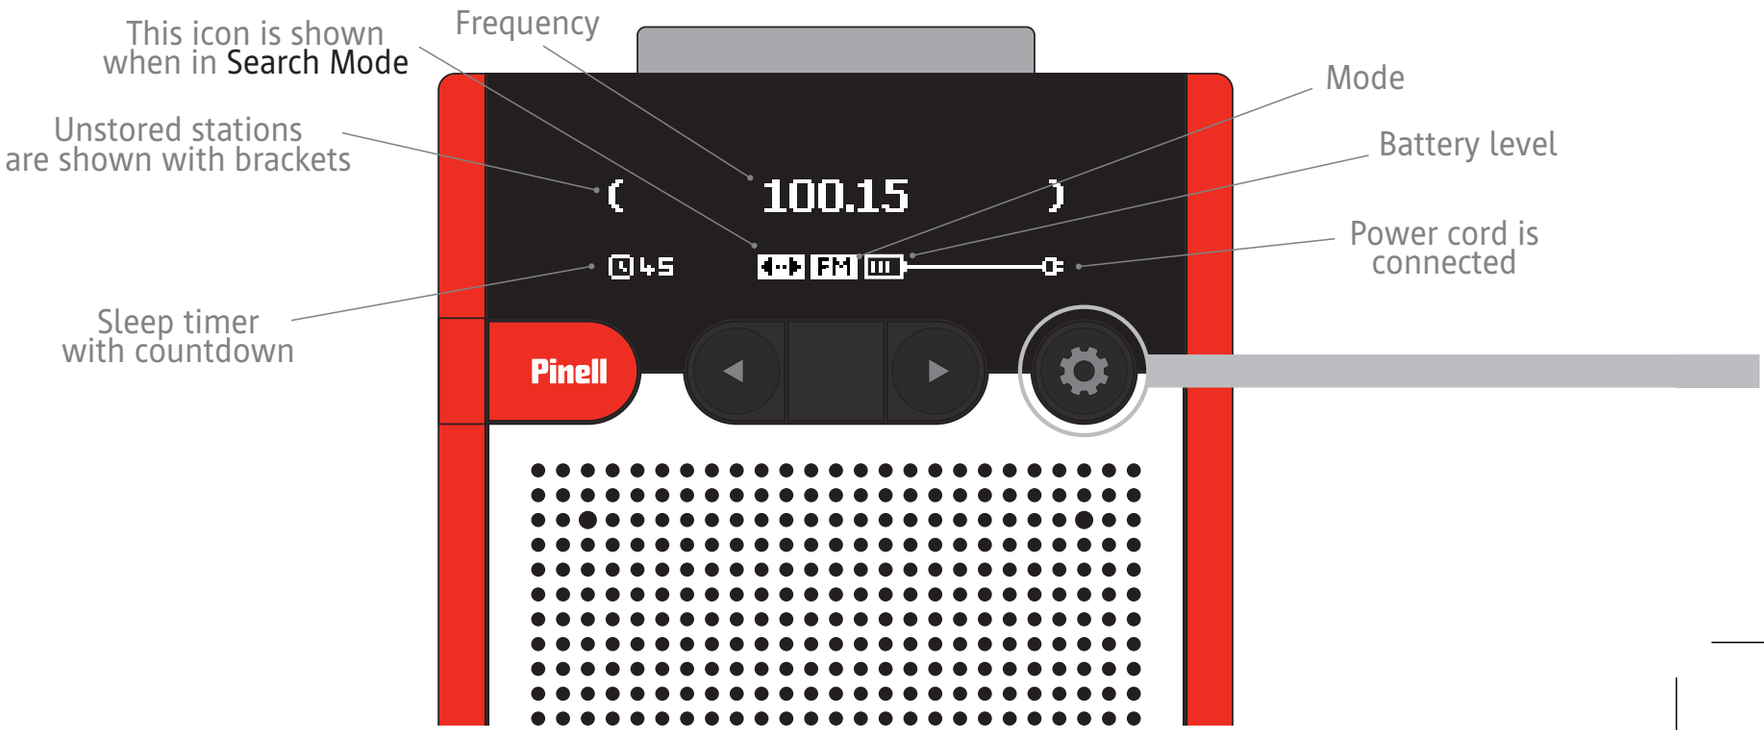

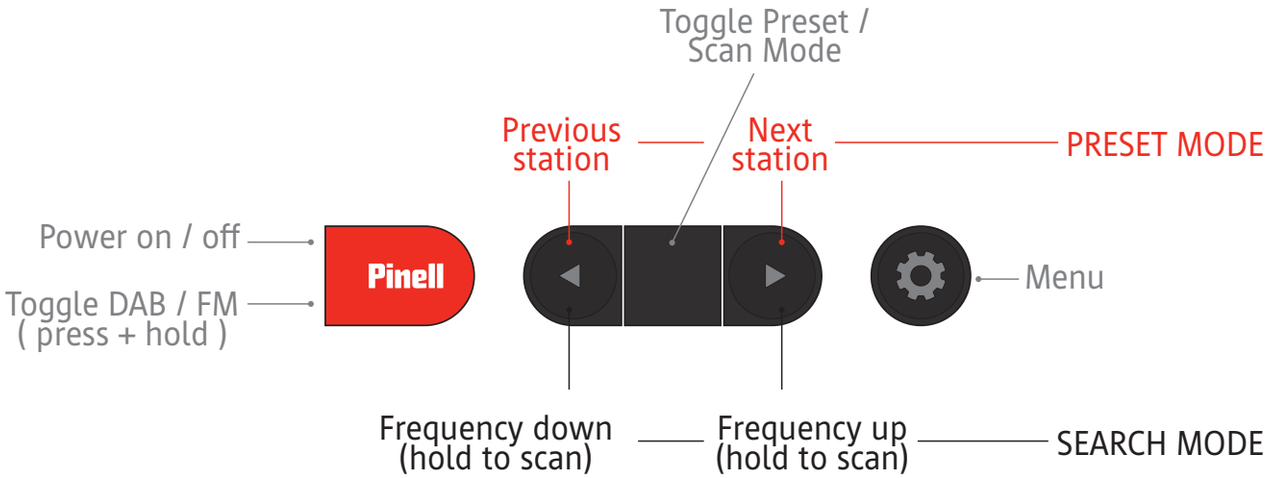

FM MODE MENU

Sleep: The sleep function will power off the radio after the period of time you choose. Options are: 15, 30, 45, 60 and 75 minutes.

Rescan all stations: FM stations are available in certain areas. So if you bring your Go to a new location, the stored list of stations may not be accurate. To fix this, choose “Rescan all stations” to refresh your station list to include any newly available stations and remove all unavailable stations.

System menu

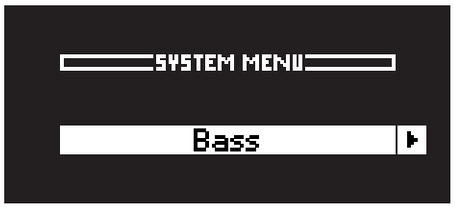

Bass: For the bass hungry, adjust the bass level up to achieve more punch. For the easily scared: adjust it down to reduce bass power.

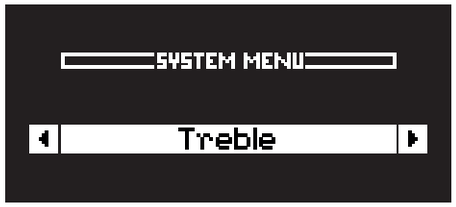

Treble: Adjust the treble to control the clarity of the sound. For example will more treble usually increase the clarity of voices.

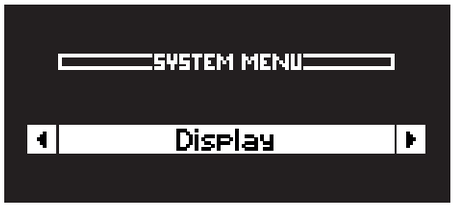

In the **Display** panel, the properties of the display are adjusted. There are two sections: **Brightness** adjusts the screen brightness between low, medium and high. **Timeout** adjusts how quickly the display turns off when no button has been pressed for a while: Off, 10 sec, 20 sec, 30 sec, 1 min, 2 min and 3 min.

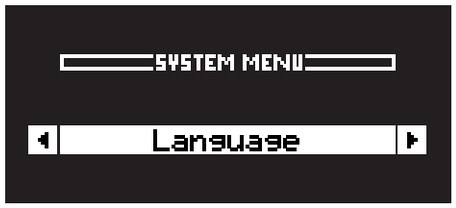

Language: Choose your preference among the 10 built-in languages: English, Nowegian, Danish, Swedish, Finnish, French, German, Spanish, Italian and Dutch.

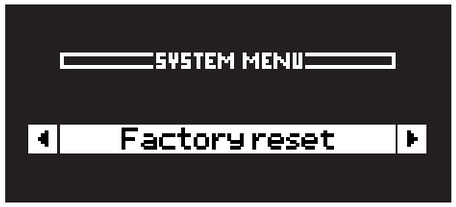

Factory reset: This option will erase all settings and stored stations, and reset the radio to the standard factory settings. After factory settings are restored, you'll be taken to the first-time startup sequence as described on page 6.

SW version: For service and troubleshooting, here you can see the currently installed software versions on the radio.

Safety precautions & recommendations

We recommend to switch off the radio when not in use.

Don't leave the radio within the reach of small children.

Make sure to place the radio more than 1.5m away from any water source.

The apparatus[1] shall not be exposed to dripping or splashing and no objects filled with liquids, such as vases, shall be placed on the apparatus.

1 We're sorry for using such complicated language. Unfortunately, it's mandatory by law. It's just a fancy way of saying 'Radio'.

Only use the power supply that came with your radio – or an original replacement provided by your Pinell dealer. To prevent damage to your radio and avoid the risk of electric shock, make sure the power supply is not damaged and is connected according to the information given in this manual and on the power supply. You should also make sure the power supply is plugged into an outlet that's easy to reach. If your radio is damaged, please unplug it from the mains power.

Don't use your radio in very damp conditions, such as in a small bathroom with poor ventilation. **Make sure the radio is not directly subjected to water.** Any contact with liquid may cause irreparable damage. If liquid enters the radio, immediately disconnect it from the power outlet and contact your Pinell dealer.

Keep the radio away from heat sources such as radiators, candles, lamps, etc. To avoid overheating, do not place the radio in a tightly confined space. Make sure to leave at least 10cm of free air on all sides.

Power supply: Pinell of Norway - Model: Y18DE-100-1600 – Input: 100-240V ~ 50-60Hz 0.5A – Output: 10V DC 1600mA

Never open the radio. It contains no user-replaceable or -repairable parts, and you run the risk of electric shock.

For optimal audio quality, use your radio at ambient temperatures **between +5°C and +40°C.**

The use of headphones at high volume can cause hearing damage. Sound perception can be misleading. Over time, your hearing "comfort level" gets used to higher volumes. After prolonged listening, what may seem a "normal" volume to you, may in fact be too high and harmful to your hearing. To protect yourself from this risk, set the volume to a safe level and do not increase it subsequently. **To prevent possible hearing damage, do not listen at high volume levels for long periods.**

Disposal of Waste Electrical & Electronic Equipment

This symbol on the product or on its packaging indicates that this product should not be treated as household waste. Instead it should be handed over to a suitable collection point for the recycling of electrical and electronic equipment. By ensuring this product is disposed of correctly, you will help prevent potential negative consequences for the environment and human health, which could otherwise be caused by inappropriate waste handling of this product. The recycling of materials will help to conserve natural resources. For more detailed information about recycling of this product, please contact your local council office, your household waste disposal service or the shop where you purchased the product.

To prevent damage to your radio and avoid the risk of explosion, **only use the battery pack supplied with your radio**. Or an original replacement battery provided by your Pinell dealer.

We provide 6 months warranty on the built-in battery.

Declaration of Conformity

We declare Pinell Go is in conformity with directives 1999/5/EC & 2011/65/EU with reference to these standards:

EN 5013:2001 + A1:2003 + A2:2006, EN 55020:2007 + A11:2011, EN 61000-3-2:2006 + A1:2009 + A2:2009, EN 61000-3-3:2008, EN 60065:2002 + A1:2006 + A11:2008 + A2:2010 + A12:2011, IEC 62133

The latest full version of our declaration of conformity may be found at: **www.pinell.com/declarations**

Ole Morten Skymoen
CEO

Pinell
Postboks 150
0619 Oslo
Norway

www.pinell.com

Postboks 150, Oppsal
0619 Oslo
Norway